



# AC-DC 12W


## 6A-126WU12

Level VI CoC Tier 2  
**WALL-MOUNT**  
 (Fixed type)

**Features:**

- IEC/EN/UL/CUL 62368
- Universal AC Input 90~264Vac
- Regulated Output With Low Ripple Noise
- 100% burn in test
- 1 year warranty
- CEC,DoE Level VI
- WEEE / ROHS 2.0 / REACH 2.0
- Safety : UL/CUL,FCC

**Dimension:**

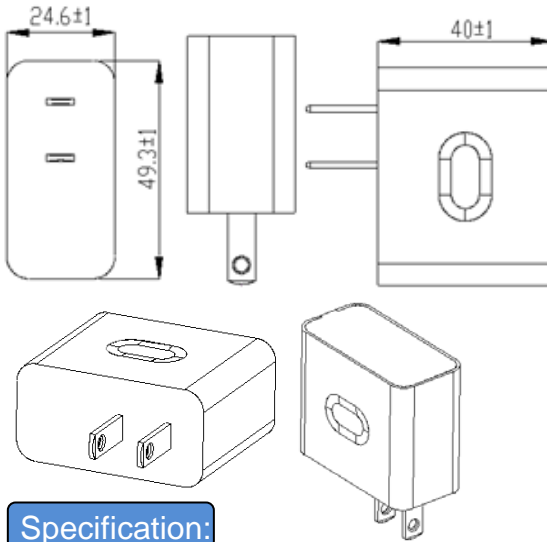

Model No.	O/P Voltage	O/P Current	O/P Watts
6A-126WU12	12V	1.0A	12.0W

**Specification:**

Input	Voltage	AC 90V~264V Universal Full Range
	Frequency	47-63Hz
	Current	600mA
	Leakage Current	< 0.25mA
Others Protection	Start up time	< 3000mS @115VAC Full Load
	Rise time	<100mS
	Protection	OCP/OVP/SCP
	Cooling	Natural Convection Cooling
Environment	Temperature	Operating: 0~40℃;Storage: -10~+70℃
	Humidity	Operating: 20%~85%;Storage: 10%~95%(Non Condensing)
M.T.B.F	50K Hours MIL-HDBK-217F @ 115VAC/ 230VAC Full Load Ambient : 25℃	
Safety Regulation	UL 62368-1, CSA C22.2 No.62368-1, IEC62368-1, EN62368-1	
EMC	EMI	FCC CFR 47 PART 15B , EN55032 , EN61000-3
	Energy Efficiency	Average active efficiency > 82.96% Min @ 115Vac / 60Hz input
	No-load power consumption	≤ 0.1W Min @ 115Vac / 60Hz input

**英格爾科技股份有限公司**  
**ENG ELECTRIC CO.,LTD.**

台灣桃園市龜山區民生北路1段536號5樓  
 5F., No. 536, Sec. 1, Minsheng N. Rd.,  
 Guishan Dist., Taoyuan City 333016,  
 Taiwan



TEL:886-3-212-1122 FAX:886-3-212-1570 E-mail:eng@eng.com.tw http://www.eng.com.tw

